

Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin			
Wire Size	8 AWG	.20±.02 DIA		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	(3) PLS .31		
Wire Strip Length	3/4 in.			
Stud Size	#10	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.23±.0463±.0213 REF. B		
UL Temperature Rating	90° C	.75±.02 (A)		
C.S.A Certified Wire Connector	Yes	2.14±.06		
Panduit Color Code on Barrel	RED			
Panduit Die Index No. on Barrel	P21			
Alternate Industry Die Index No. () on Barrel	N/A	Wire inspection window		





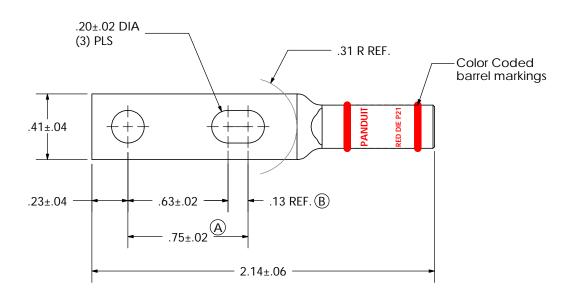

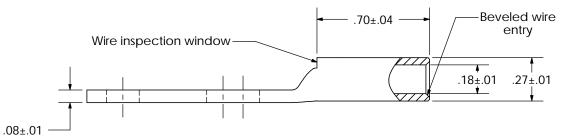

Wire Connector

						CORP. TINLEY PARK, ILLINOIS
						LCC8-10ABW-L
01	2/05	JHNU	CSH	ADDED DIMENSION     REMOVED TOLERANCE & ADDED REF. TO DIMENSION	12446	Copper Lug - Two-Hole, Long Barrel with Window
REV	DATE	BY	СНК	DESCRIPTION	ECN	N/A DRAWING NO / CAD FILE LCC8-10ABW-CUST