

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION ,19 .

© COPYRIGHT 19


BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC BD DIST 36

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REDRAWN PER EC 0020-1245-95	08 NOV 95	-	-

SECURED W/GUIDE PIN & OR SOCKET, SEE INSTRUCTION SHEET NO 1408.

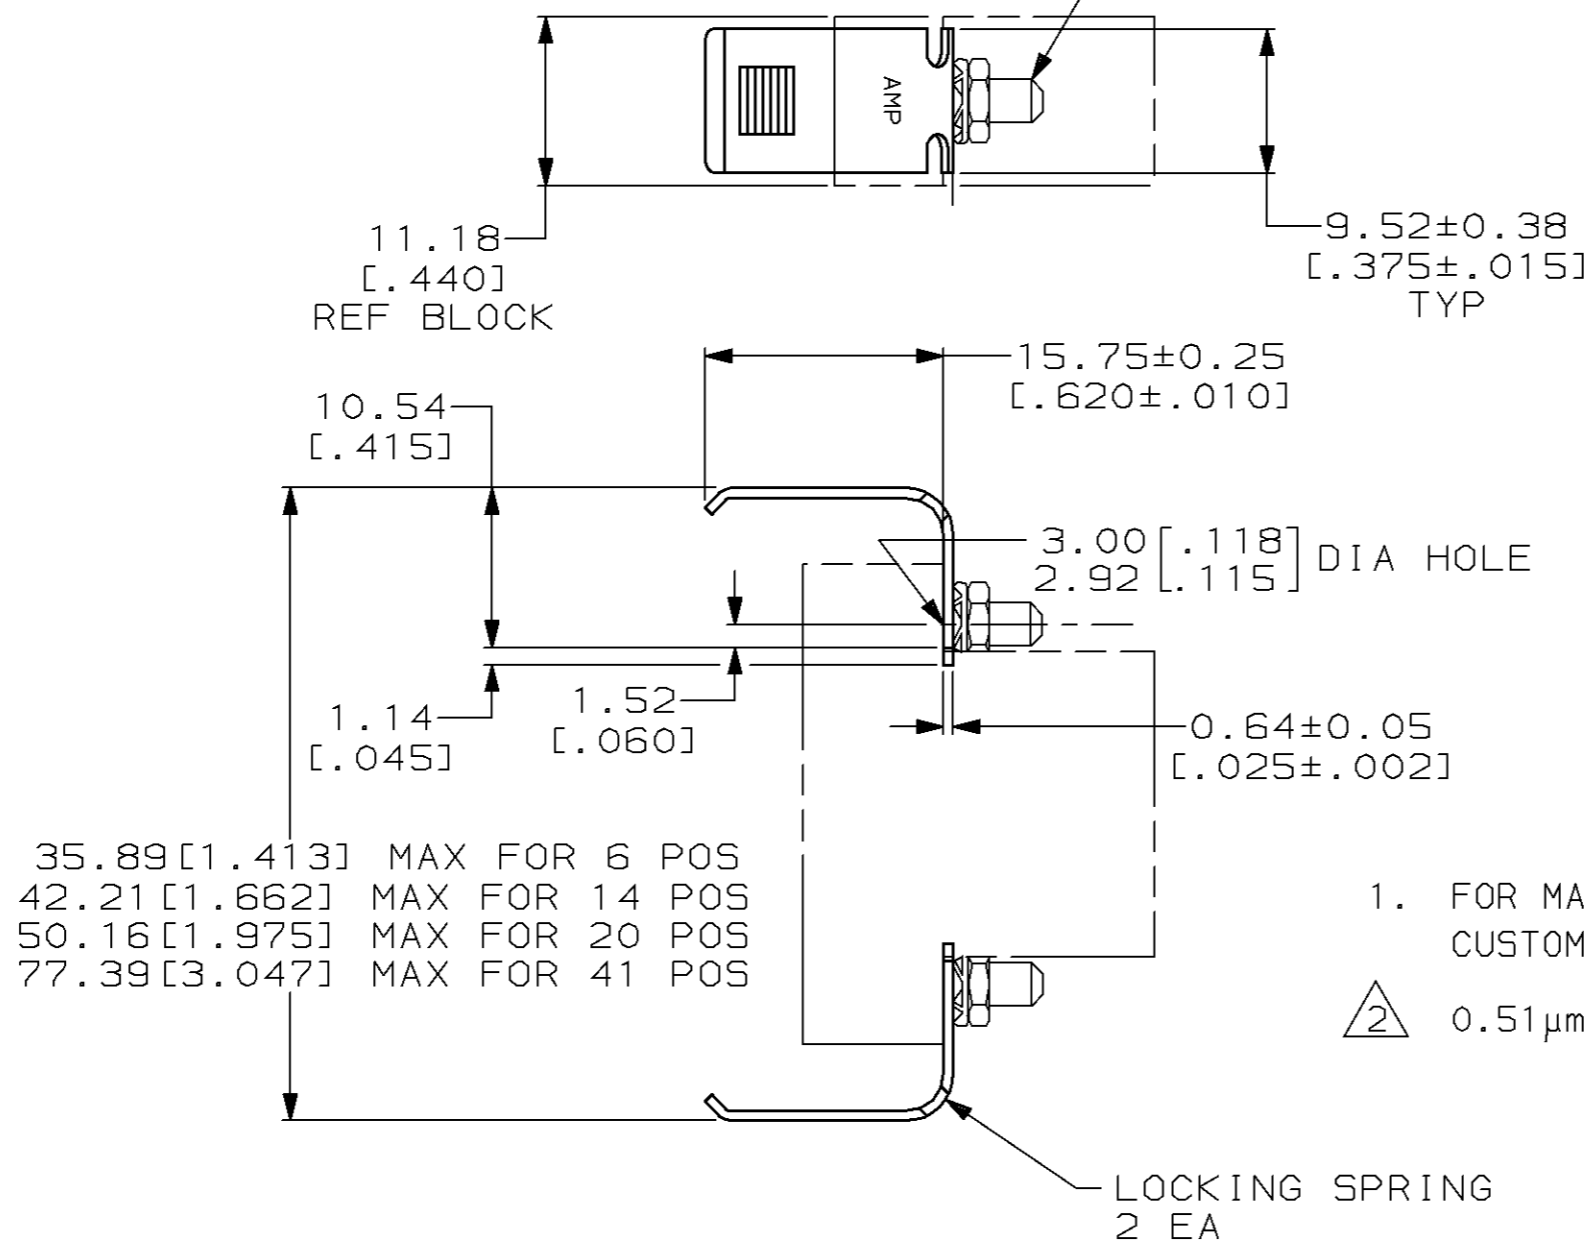


1. FOR MATING PART (SPRING CATCH) SEE CUSTOMER DWG 201922.

2 0.51µm [.000020] MIN NICKEL OVER COPPER FLASH.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:



0 PLC	±-
1 PLC	±-
2 PLC	±0.13 [.005]
3 PLC	±-
4 PLC	±-
ANGLES	±-

MATERIAL
CARBON STEEL

FINISH



DWN 08 NOV 95
C. REIFSNYDER

CHK 17 NOV 95
R. STONE

APVD 19 NOV 95
G. STEINHAUER

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

08 NOV 95

17 NOV 95

19 NOV 95

-

-

-

-

AMP AMP Incorporated
Harrisburg, PA 17105-3608

NAME
LOCKING SPRING KIT,
UNASSEMBLED, FOR 6, 14,
20 & 41 POS BLOCKS, M SERIES

SIZE A3 CAGE CODE 00779 DRAWING NO C-201921

SCALE 2:1 SHEET 1 OF 1 REV K