


DESCRIPTION	APPROVED BY/DATE	REV
	C. Weathers 9-23-91	0
ECO-09-026495	AEG	10DEC09 A1

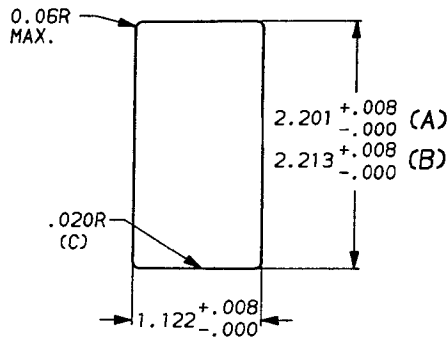

RECOMMENDED PANEL CUTOUT
(NOT TO SCALE)

NOTES:

- (A) FOR PANEL TH'K. OF .031 - .079
- (B) FOR PANEL TH'K. OF .083 - .126
- (C) FOR SNAP-IN APPLICATION, THE SIDES OF THE CUTOUT MUST HAVE A .020R. ON THE INSTALLATION SIDE.


SAFETY ORGANIZATION(S):

THIS MODULE HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:


UL, CSA, VDE, SEV, SEMKO, DEMKO, NEMKO, FINLAND, NETHERLANDS, & ITALY

SPECIFICATIONS:

FUSE (5 X 20 MM OR 6,3 X 32 MM): MAX 6,3 AMP
(MODULE ACCEPTS EITHER ONE OR TWO FUSES)
STANDARD RATING: 10 A 250 VAC
UL 498/CSA 22.2 RATING: 6 A 250 VAC
MAX PIN TEMPERATURE: 65°C
TESTING VOLTAGE TO ACCESSIBLE SURFACES: 4000 VAC
SUITABLE FOR APPLIANCE CLASS: I
INSULATION RESISTANCE: >10 MΩ

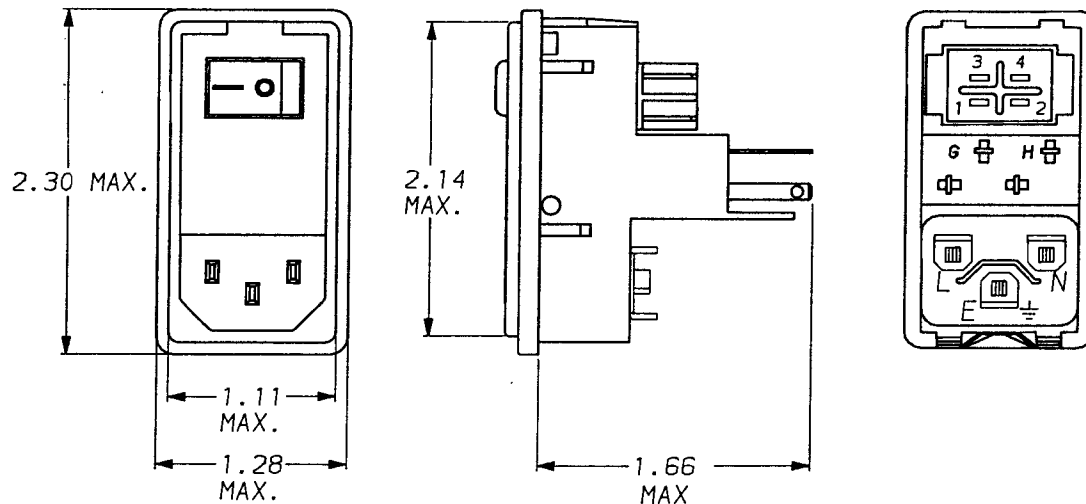

NOTE: ALL BACKPLATE TERMINALS ARE .110 FASTONS EXCEPT SWITCH TERMINALS WHICH ARE .187 FASTONS.



ALTERNATE SWITCH

2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6609121-2
OBSOLETE 1609121-2

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.

TOLERANCE EXCEPT AS NOTED DECIMAL: .XXX .XX .X ANGLES ENGLISH: METRIC: ± —	<p>corcom LIBERTYVILLE, IL 60048</p>
MATERIAL: AS SUPPLIED	
FINISH: AS SUPPLIED	<p>POWER ENTRY MODULE</p>
SCALE: NTS DATE: 9-19-91 DRW. BY: CFW ORIGINATOR: CFW	<p>DRG. NO.: 6EL1SC.A1 REV.: A1</p>